


NOTE: WHEN EXISTING BITUMINOUS STREET PAVEMENT IS INPLACE, SAW CUT AND REMOVE EXISTING PAVEMENT 6" MINIMUM FROM LIP OF GUTTER. PLACE BITUMINOUS PATCH TO MATCH EXISTING PAVEMENT SECTION.

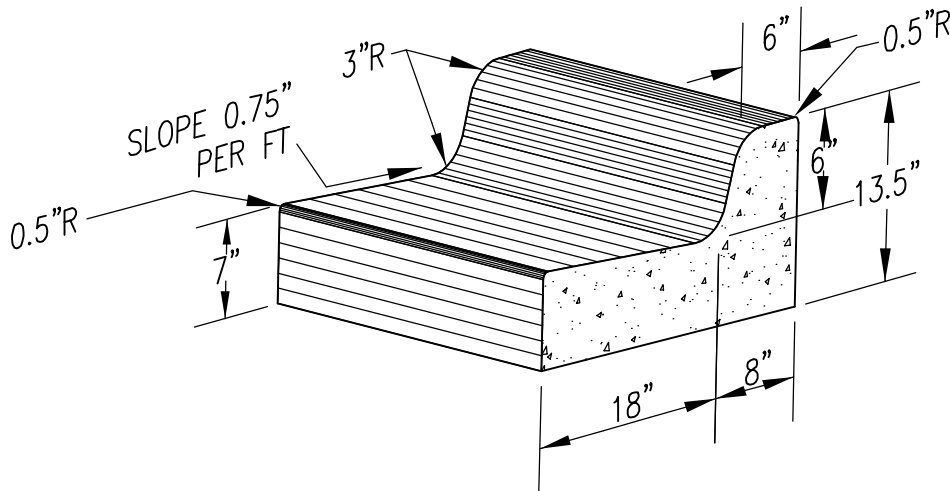

NOTE:

1. THE CONCRETE CURB & GUTTER SHALL BE CONSTRUCTED ON 6" AGGREGATE BASE, CL. 5 (2211) (100% CRUSHED LIMESTONE) (INCIDENTAL TO CURB & GUTTER)

## CONCRETE CURB & GUTTER DETAIL DESIGN B618

NOT TO SCALE  
PLATE 7001

### CONCRETE CURB & GUTTER DESIGN B618

STANDARD DETAIL  
PLATE NO:  
**7001**

APPROVED: ADOPTED BY CITY COUNCIL ON JANUARY 12, 2004

REVISED: REVISION ADOPTED BY CITY COUNCIL ON MARCH 9, 2009

REMARKS:

**SAINT PETER UTILITY STANDARD DETAIL**

